




Canfor Pulp L.P. operates the Prince George, Intercontinental, and Northwood Pulp Mills in Prince George, BC, Canada. The mills all produce ECF 90 pulp from a mixture of softwood species indigenous to the north central interior of British Columbia. The highly versatile fibre properties of our ECF 90 make it suitable for use in the manufacturing of a wide variety of products, especially those requiring the highest tensile strength.

**Inherent Pulp Properties**

Brightness (%ISO)	89 (off machine)
Dirt Levels mm <sup>2</sup> /kg/ppm	Typically less than 2 mm <sup>2</sup> /kg or 1 ppm
0.5% CED Viscosity (mPa.s)	21.0

**Typical Species Analysis**

Lodgepole Pine	70-80%
White spruce	20-30%
Sub-alpine Fir	5%

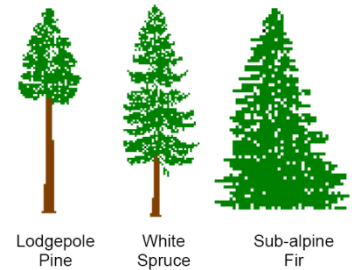

**Fibre Properties (FQA)**



Fibre length LWL (mm)	2.4
Fibre coarseness (mg/m)	15
Fines LWL (%)	3

**Bale Characteristics**

	Northwood	Intercon	Prince George
Length (cm)	83	85	83
Width (cm)	83	79	84
Height (cm)	41	40	38
Weight (kg)	247.5	250	250

**Typical response to refining on a 12 Inch Sprout Bauer disc refiner**

Specific Energy (kW*hr/ADMt)	Freeness CSF (mL)	°SR (°)	Breaking Length (km)	Tear Index mN.m <sup>2</sup> /g	Burst Index (kPa.m <sup>2</sup> /g)	Density (g/cm <sup>3</sup> )
0	689	17.0	3.9	26.9	2.5	0.54
52	600	21.0	6.8	19.0	5.0	0.59
111	500	25.0	8.6	15.0	6.6	0.63
208	300	40.0	10.2	12.3	7.9	0.67

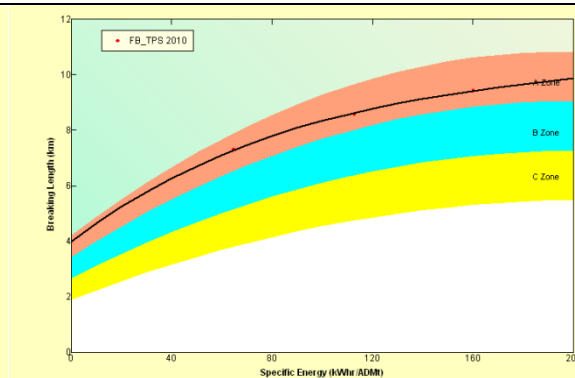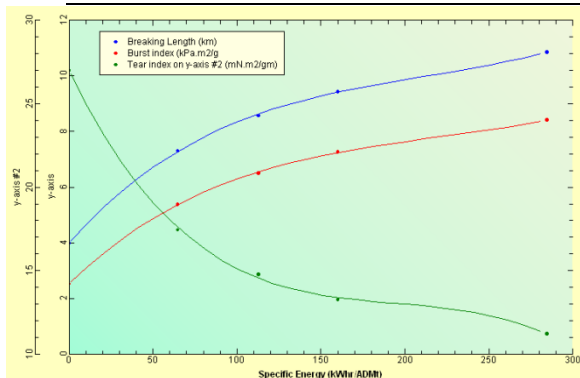

Interpolations	@ 4 km	@ 5 km	@ 7 km	@ 9 km	@ 10 km
Tear Index (mN.m <sup>2</sup> /g)	27	23.9	18.3	14	12.9

Controlled Wood status

All of the pulp from the Intercon, Prince George and Northwood mills is 100% FSC Controlled Wood SW-CW003366

Chain of custody status

Any of the pulps from the Intercon, Prince George and Northwood mills can be allocated under a PEFC Chain of Custody (KPMG 2563). Please contact your Canfor Pulp sales executive for more information.

The pulp and fibre properties listed here are based on long-term averages. Results on individual samples may vary from the values listed above. Pulp Evaluations are done using a 12-inch Sprout Bauer Refiner. Handsheets are prepared and tested based on PAPTAC/TAPPI/ISO procedures and are conditioned at 50% Relative Humidity at 23°C.